
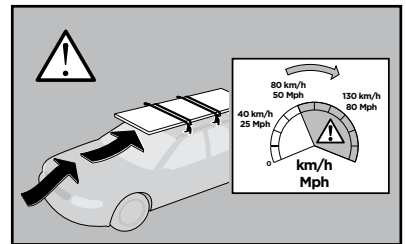
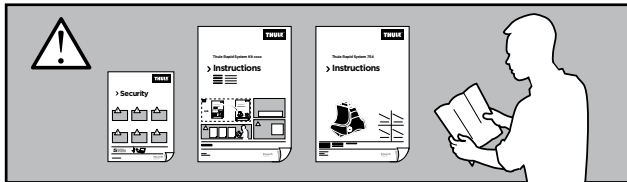
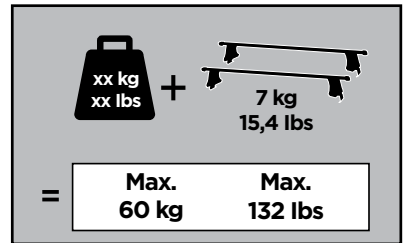





Thule Rapid System Kit 1644

> Instructions


PEUGEOT 508, 4-dr Sedan, 11-18

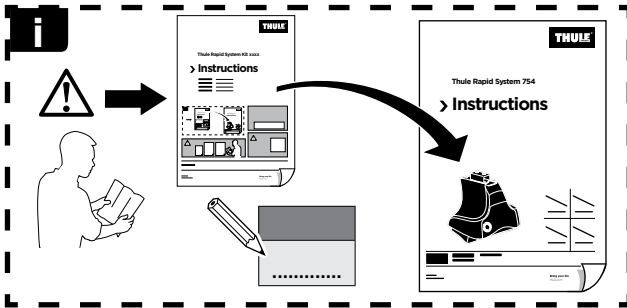

ISO 11154-E





x1



x1

1



	X (scale)	X (mm)	X (inch)
PEUGEOT 508, 4-dr Sedan, 11-18	39,5	1046	41 1/8

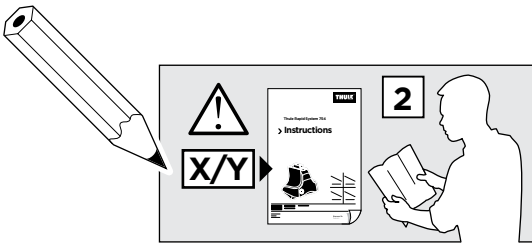


	Y (scale)	Y (mm)	Y (inch)
PEUGEOT 508, 4-dr Sedan, 11-18	37	1021	40 1/4

2

PEUGEOT 508, 4-dr Sedan, 11-18

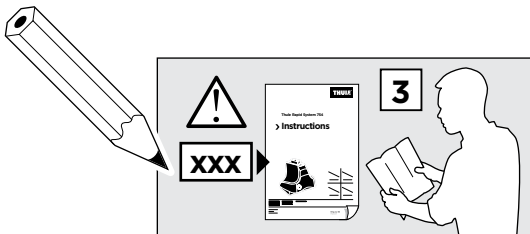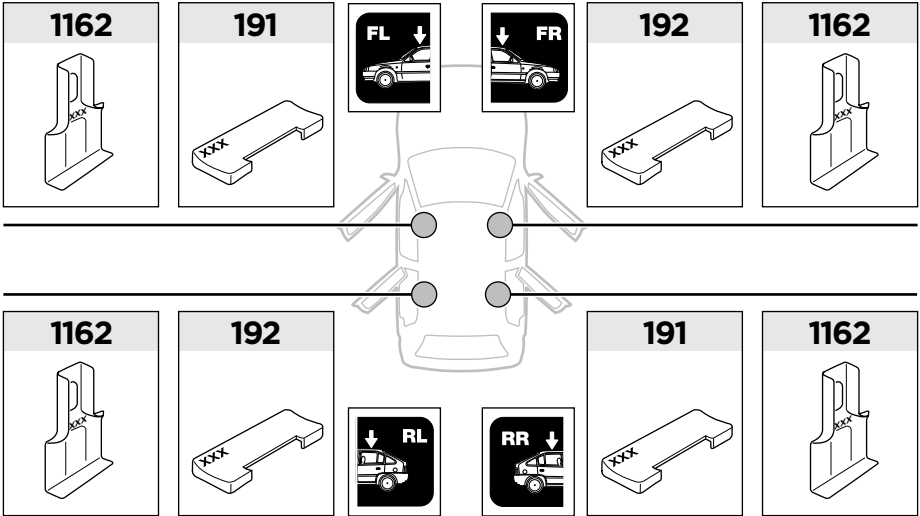

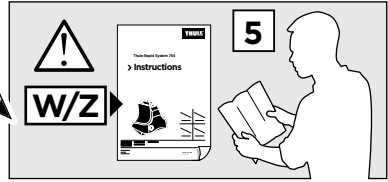3

	W (mm)	Z (mm)	W (inch)	Z (inch)
PEUGEOT 508 , 4-dr Sedan, 11-18	265	725	10 ³/₈	28 ¹/₂

